


C1GC0657


High Luminance Output Recessed Wall Light

1. Exterior details


1.1 Luminaire

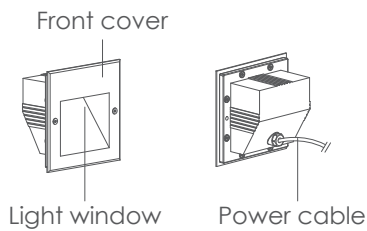

1.2 Dimension (mm)



1.3 Recessed sleeve (258#)




2. Datasheet

Housing:	12# Die-casting RAL9005 powder coated aluminum T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Front Cover:	12# Die-casting aluminum powder coated T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Light Window:	Tempered glass
Cable Gland:	IP67 copper and nicked coated
Gasket:	Molding shaped silicone seal
LED Driver:	Constant Voltage Input, Constant Current Output
Operating Temperature:	-20°C~40°C
Power Cable:	H05RN-F 2×1.0mm ² , L=0.5m
Recessed Sleeve Material:	Stainless steel

Light Source:	6×1.8W
Beam Angle:	80°×30°
Input Voltage(v):	DC 24
Operating Current(mA):	560
Consumption(w):	13.5
Luminance(lm):	482
IK:	05


3. Installation steps

Step 1




Secure the recessed sleeve

Step 2




Finish the installation of concrete surface materials

Step 3

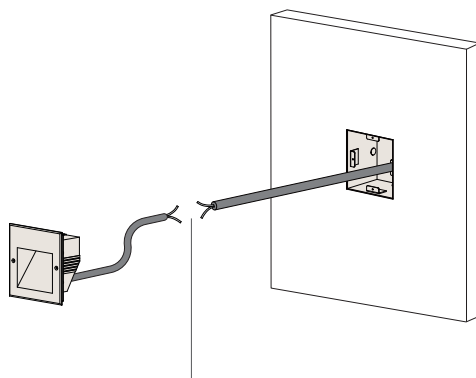

Connect the power cable

Step 4



Install the light fixture on the wall

Kapego company limited

TEL:+86 076983997830
 FAX:+86 076983997833
 Email:sales@kapego.com
 Website:www.kapego.com
 East changle Road,Yuning industrial district.
 Hengli,Dongguang ,guangdong, China 523478

