


B2FL0357


Symmetrical Linear Inground Light

1. Exterior details


1.1 Luminaire

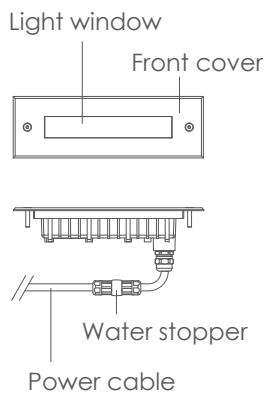

1.2 Dimension (mm)



1.3 Recessed sleeve (110#)

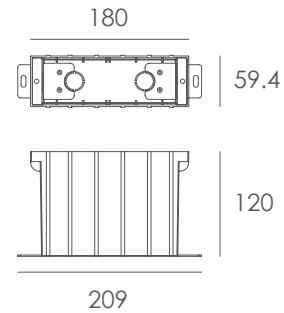


2. Datasheet

| | |
|----------------------------------|--|
| Housing: | 12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B |
| Front Cover: | Hard chromeplated stainless steel SUS 316# |
| Light Window: | Tempered step glass. T=8mm |
| Lens: | OPTICS lens. efficiency ≥ 85% |
| Cable Gland: | IP68 PG-9 PA66 |
| Gasket: | Silicon rubber molding shaped seal |
| LED Driver: | Constant Voltage Input, Constant Current Output |
| PCB: | Excellent heat conductivity aluminum, coefficient of heat Conductivity ≥ 2.0w/mk |
| Glass Pressure Capacity: | 512kgs |
| Operating Temperature: | -20°C ~ 40°C |
| Power Cable: | H05RN-F 2×1.0mm ² , L=0.5m |
| Recessed Sleeve Material: | PC/ABS ALLOYS |


| | |
|------------------------|-------|
| Light Source: | 3×2W |
| Beam Angle: | 25° |
| Input Voltage(v): | DC 24 |
| Operating Current(mA): | 240 |
| Consumption(w): | 5.7 |
| Luminance(lm): | 508 |
| IK: | 08 |

3. Installation steps


Step 1

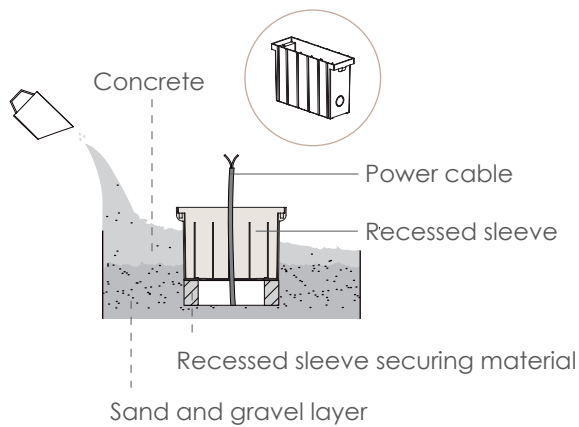

Step 2

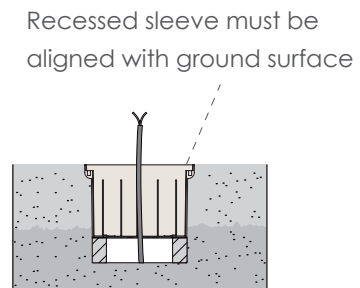


Step 3

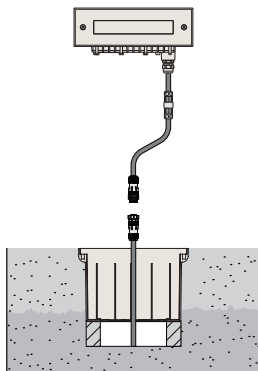

Connect the power cable

Step 4

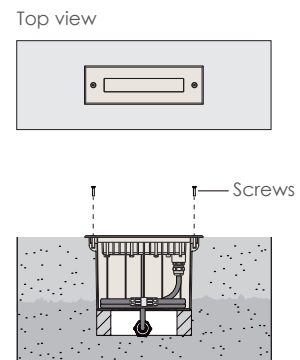

Kapego company limited

TEL:+86 076983997830
 FAX:+86 076983997833
 Email:sales@kapego.com
 Website:www.kapego.com
 East changle Road, Yuning industrial district.
 Hengli, Dongguang, guangdong, China 523478

