


B3ADX0127


Garden Light

1. Exterior details

1.1 Luminaire

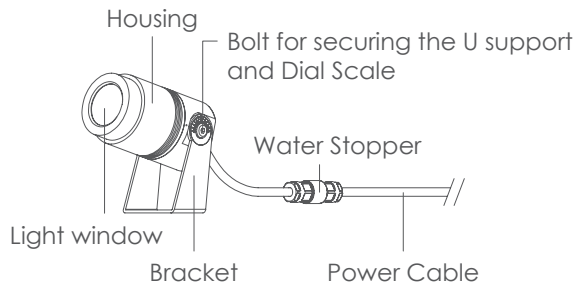


1.2 Dimension (mm)

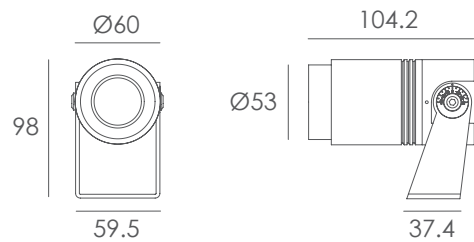


1.3 Optional accessories

Spike




Mounting base



Bevel cut hood



Honeycomb Louver




2. Datasheet

Housing:	12# Die-casting aluminum finishing or powder painting T=60-80 μm . Adhesion of ISO class 1/ASTM class 4B
Light Window:	Tempered glass. T=3mm
Cable Gland:	Nickel coated copper
Gasket:	Tooling shaped seal
Lens:	OPTICS lens, efficiency $\geq 85\%$
PCB:	Excellent heat conductivity aluminum, coefficient of heat Conductivity $\geq 2.0\text{w/mk}$
LED Driver:	Constant Voltage Input, Constant Current Output
Operating Temperature:	-20°C~40°C
Power Cable:	H05RN-F 2 \times 1.0mm ² , L=2.0m


Light Source:	1×8W
Beam Angle:	33°
Input Voltage(v):	DC 24
Operating Current(mA):	437
Consumption(w):	10.4
Luminance(lm):	1051
IK:	06

3. Installation steps

Step 1

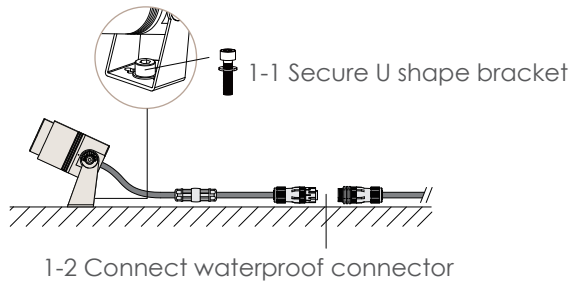


Step 2

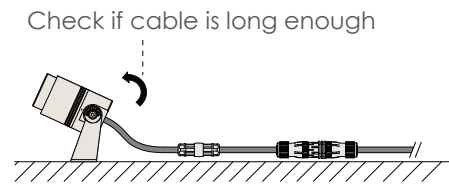


4. Accessories assemble

4.1 Spike


Step 1

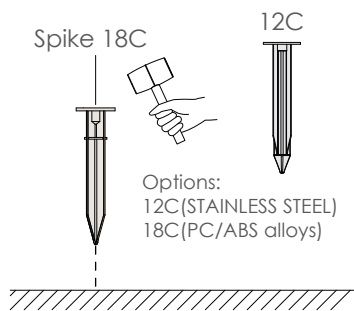


Step 2

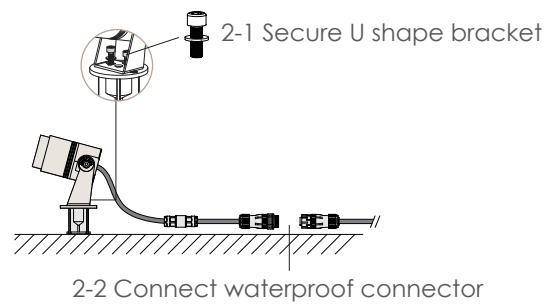


Step 3

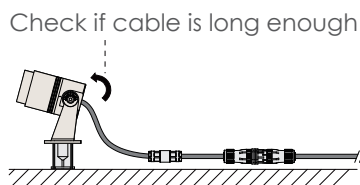

4.2 Mounting base

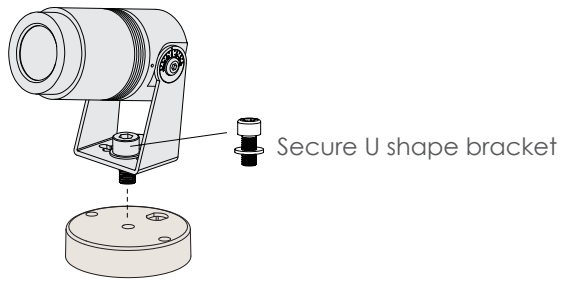

4.3 Bevel cut hood & Honeycomb Louver

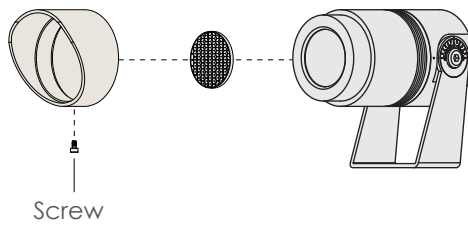

Kapego company limited

TEL:+86 076983997830
Email:sales@kapego.com
Website:www.kapego.com
East changle Road, Yuning industrial district.
Hengli, Dongguang, guangdong, China 523478

