


# D1HA1034


## Landscape Recessed Wall Light

### 1. Exterior details


#### 1.1 Luminaire

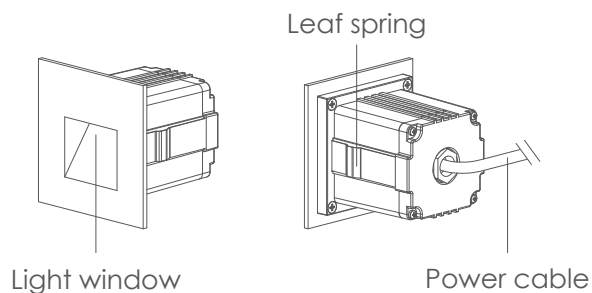

#### 1.2 Dimension (mm)

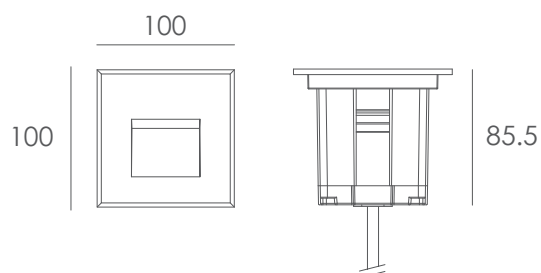

#### 1.3 Recessed sleeve (092#)

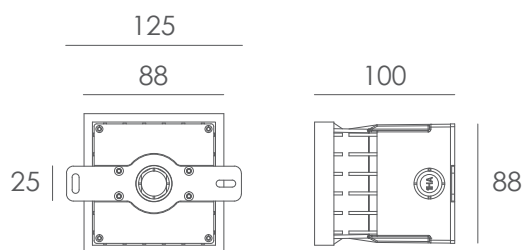


### 2. Datasheet

<b>Housing:</b>	12# Die-casting RAL9005 powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
<b>Front Cover:</b>	12# Die-casting KAP7037 powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
<b>Light Window:</b>	UVstop & Fireproof PC
<b>Cable Gland:</b>	IP67 copper and nicked coated
<b>Gasket:</b>	Waterproof silicone gasket
<b>Driver:</b>	Built in on/off driver
<b>LED Driver:</b>	Constant Voltage Input, Constant Current Output
<b>Operating Temperature:</b>	-20°C~40°C
<b>Power Cable:</b>	H05RN-F 2×1.0mm <sup>2</sup> , L=0.5m
<b>Recessed Sleeve Material:</b>	PC/ABS ALLOYS

<b>Light Source:</b>	10×0.5W
<b>Input Voltage(v):</b>	DC 24
<b>Operating Current(mA):</b>	230
<b>Consumption(w):</b>	5.5
<b>Luminance(lm):</b>	112.9
<b>IK:</b>	10


### 3. Installation steps

#### Step 1

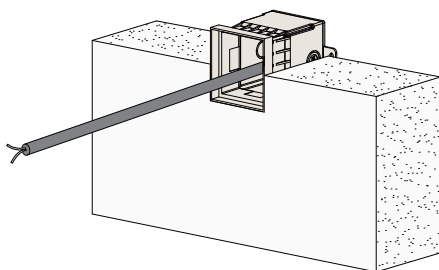


Secure the recessed sleeve

#### Step 2

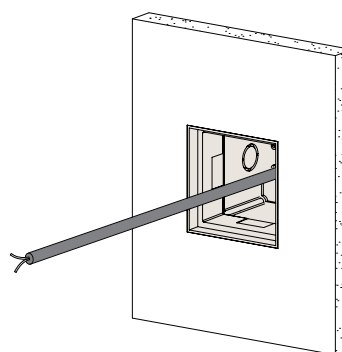


Finish the installation of concrete surface materials

#### Step 3

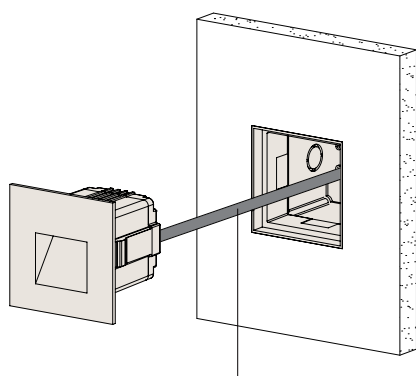

Connect the power cable

#### Step 4

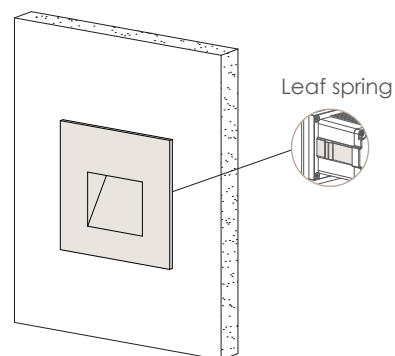

Install the light fixture on the wall

#### Kapego company limited

TEL:+86 076983997830  
 FAX:+86 076983997833  
 Email:sales@kapego.com  
 Website:www.kapego.com  
 East changle Road, Yuning industrial district.  
 Hengli, Dongguang, guangdong, China 523478

